



SAIBO
Innovation in Motion

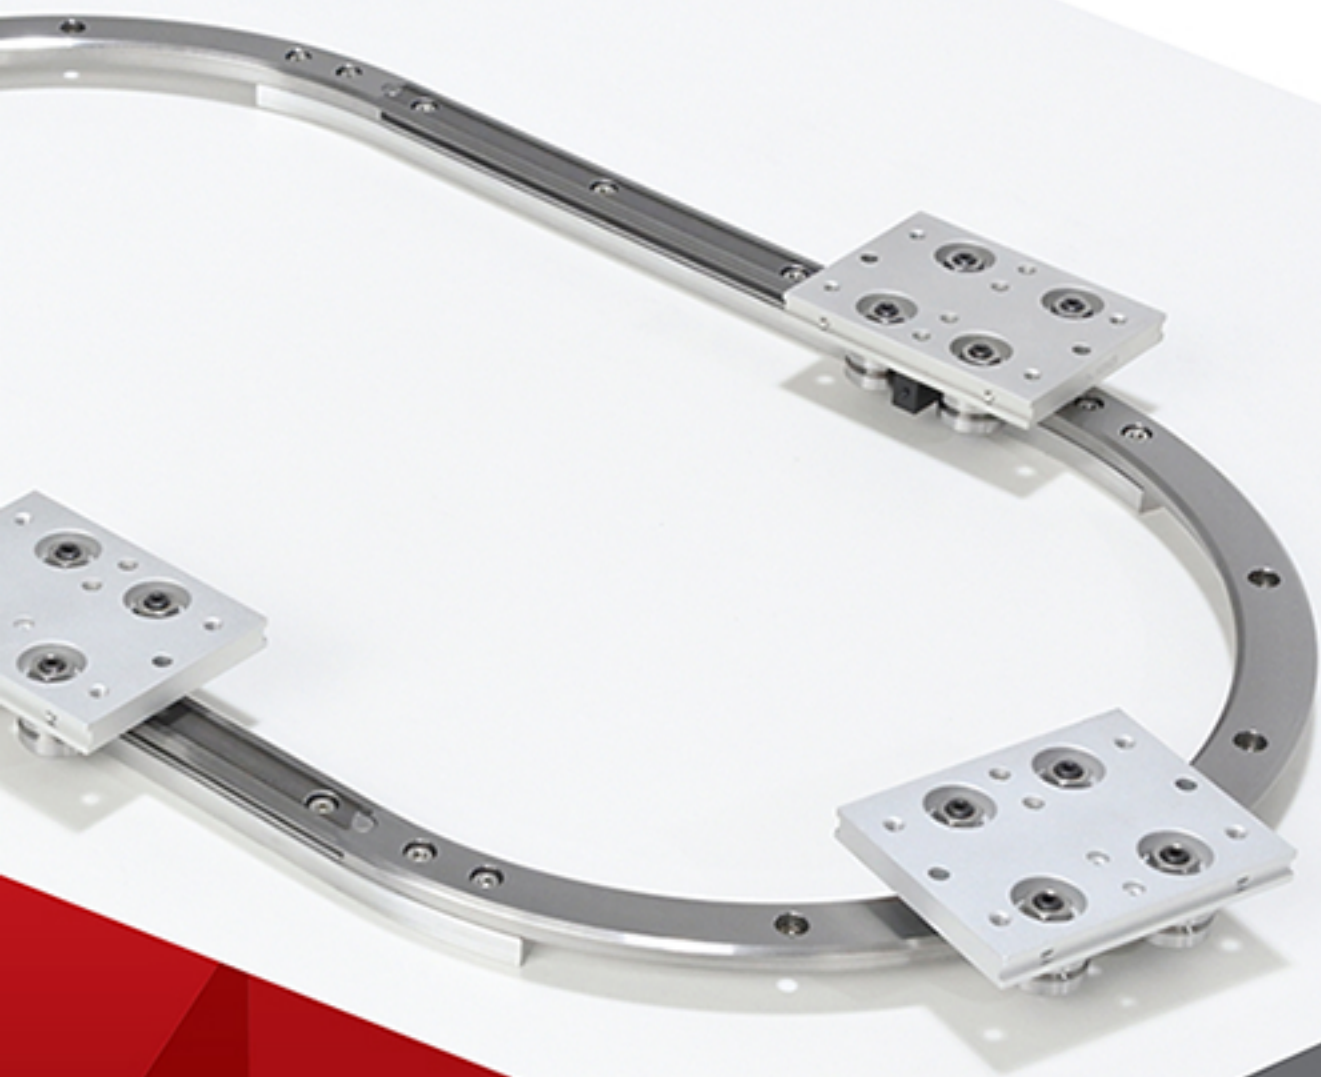


L.M76
Linear Bearings *The Engineering Edge*

OVAL TRACK SYSTEM

SAIBO provides a wide choice of sizes and options to build linear, curve motion system. All of components including linear guides, ring guides, bearings and lubricate parts are designed standard and modularized. Customer can select and build motion system easy and quickly.

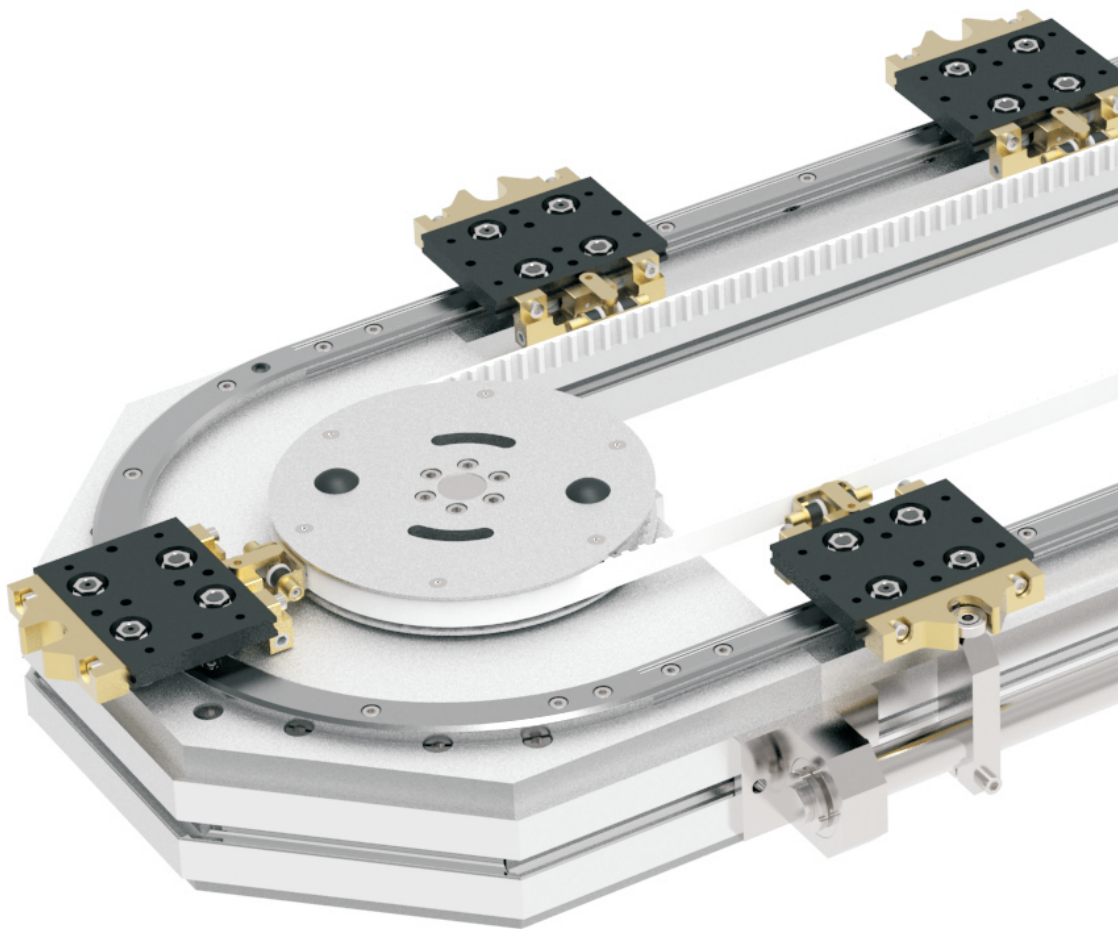

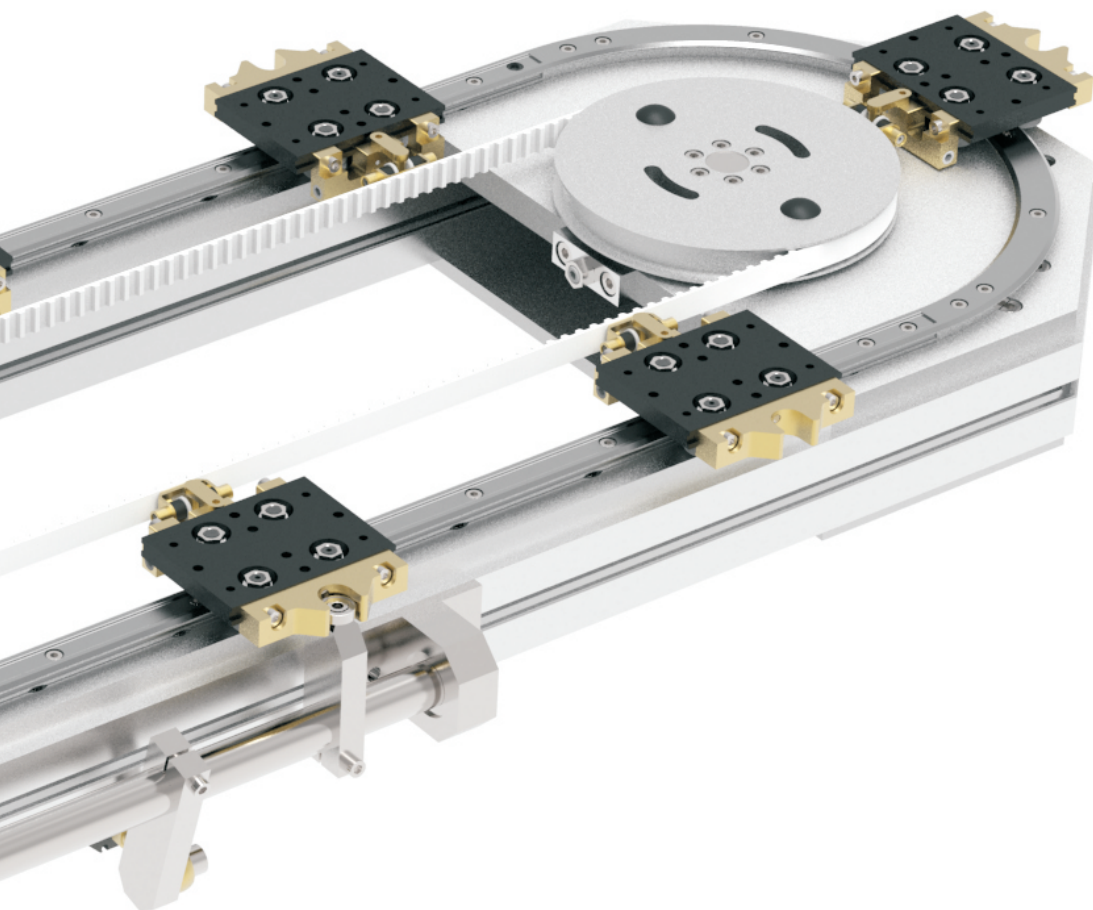


- Rail Profiles are produced in German.Design and produce according to DIN standard.
- Ring rail radius are standard, Straight rail length is optional.
- Additional locating device realize carriages precision location.
- The connections between belt and carriages are flexible and torque protected.
- Raydent (corrosion protection) is optional for rail.

Straight Rail

Made of Germany high quality bearing steel
 Deep hardened in working surfaces for high wear resistance
 Ground Double 70° V working edges together to ensure parallelism
 Soft rail body for customization machining process
 Provide 3 standard sizes for customer's selection
 Two precision rails G1 and G3 is optional, ground and un-ground
 Precision G3 rail length could be up to 5.5 meters without connection
 Longer length (Unlimited) can be achieved by Connection


Ring Rail

Made of high quality bearing steel
 Deep hardened in working surfaces for high wear resistance
 Ground Double 70° V working edge ensure parallelism
 All surfaces are ground for precision
 Provide wide range of standard sizes
 Customized assembly holes are available

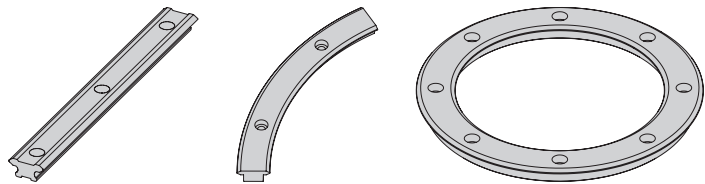



Precision

SAIBO provides two precision grades. G1 ground and G3 unground. Here we must emphasize that G3 grade's motion is also very smooth and stable. It is fit for smooth running without very high precision and low cost request. But when linear rail connect ring rail, it must be G1 grade.

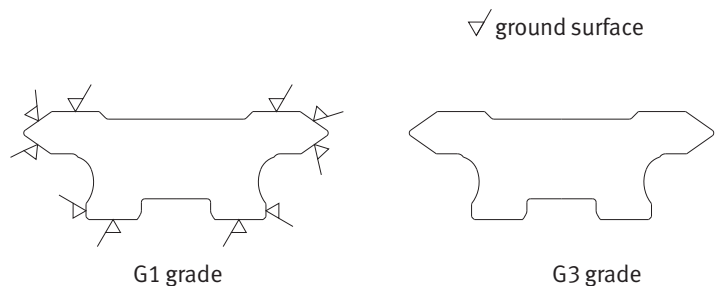


Rollers

Made of high quality bearing steel
 Whole body hardened for high wear resistance
 Supply Twin and Double row bearings
 (See below figure)
 Concentric / Eccentric bolt supplied

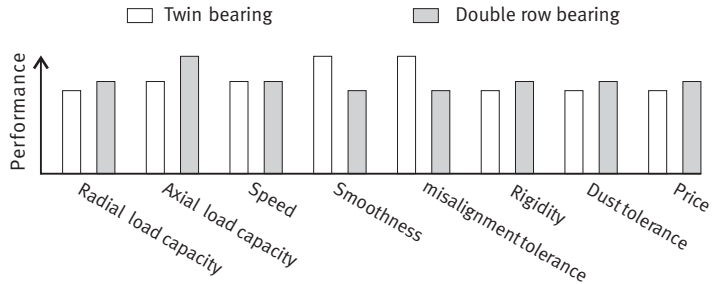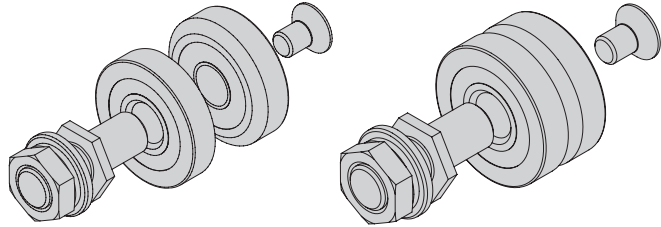


Floating Bearing

Outer ring could float in axial direction to compensate installation parallelism
 Made of high quality bearing steel
 Whole body hardened for high wear resistance
 Concentric / Eccentric bolt supplied



Roller Type Selection

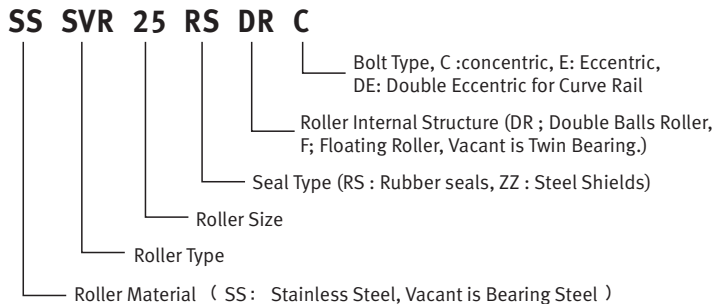

Roller Type Selection Please refer to page 13.


Cap Seal

Protect bearing against dust

Protect operator for safety

Lubricated felt wiper contact rail's working surface to increase load capacity and life

Standard and interchangeable

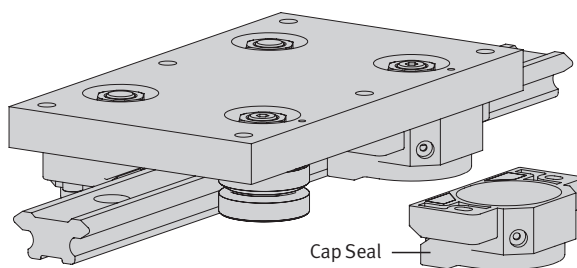


Lubricate Wiper

Lubricated felt wiper contact rail's working surface to increase load capacity and life

Lubricated felt wiper is pushed lightly by a small spring to ensure low friction with the rail's working surface

Easy to fill lubricate oil from its fill hole

Standard and interchangeable

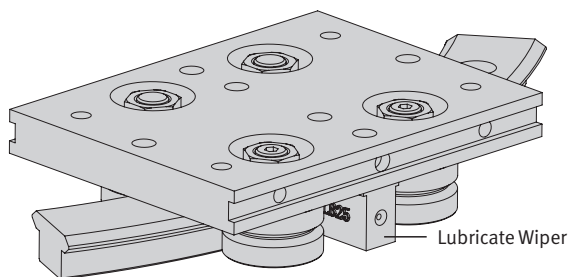



Lubricate Lubricated felt wiper contact rail's working surface to increase load capacity and life

Lubricated felt wiper is pushed lightly by a small spring to ensure low friction with the rail's working surface


Oil charging holes supplied for the Track Motion System

Automatic lubricate bleed could connect to the rail's oil charging holes very easily.


Standard and interchangeable

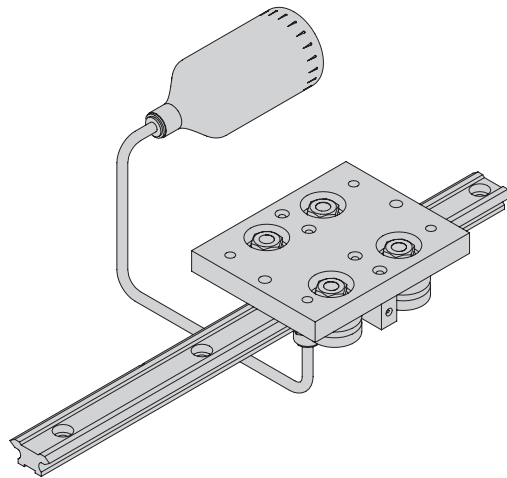

Oval Rail

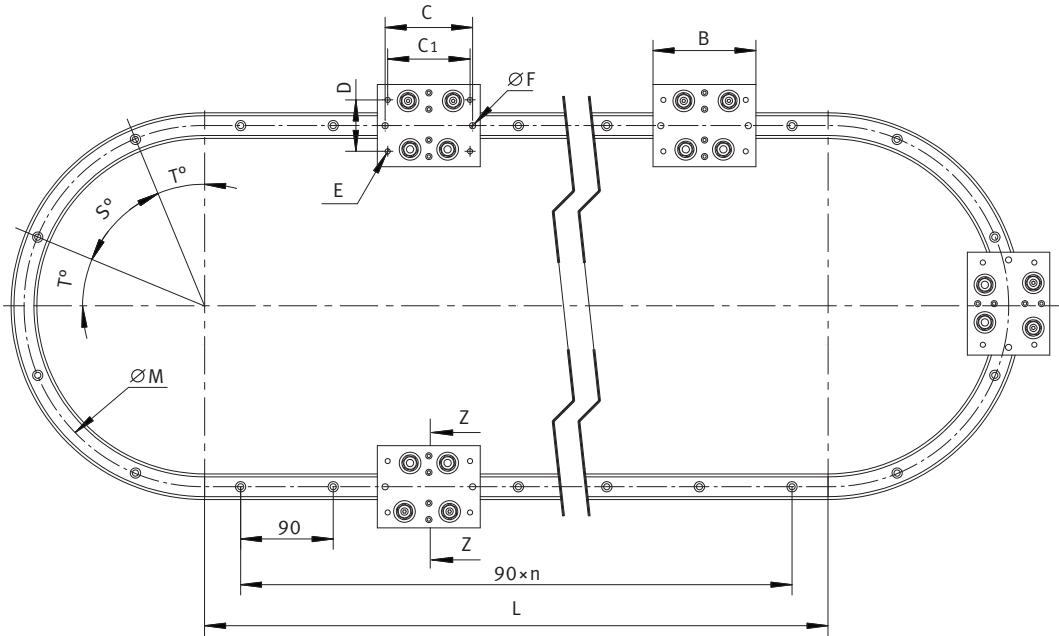

Assembly code	Components			A	B
	Straight Rail	Ring Rail	Carriage		
SB-LGV25XL-CR25 159 R180	SB-LGV25	CR25 159 R180	SRC25 159	80	95
SB-LGV25XL-CR25 255 R180		CR25 255 R180	SRC25 255		100
SB-LGV25XL-CR25 351 R180		CR25 351 R180	SRC25 351		105
SB-LGV44XL-CR44 468 R180	SB-LGV44	CR44 468 R180	SRC44 468	116	145
SB-LGV44XL-CR44 612 R180		CR44 612 R180	SRC44 612		150
SB-LGV76XL-CR76 799 R180	SB-LGV76	CR76 799 R180	SRC76 799	185	190
SB-LGV76XL-CR76 1033 R180		CR76 1033 R180	SRC76 1033		210
SB-LGV76XL-CR76 1267 R180		CR76 1267 R180	SRC76 1267		250
SB-LGV76XL-CR76 1501 R180		CR76 1501 R180	SRC76 1501		270

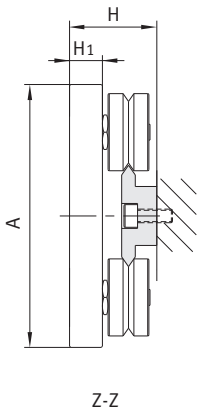


Type Code

SB- LGV 25 X2000 -CR25 159 R180
Segment angular: 180°
Ring railway diameter
Ring railway size
Railway length
Railway size
Linear railway
SAIBO motion symbol

Dimension									
C	C ₁	D	E	F	H	H ₁	M	S°	T°
80	85	50	4xM6	2x6	30.5	11.5	159	45	22.5
85	80		4xM6	2x6			255	45	22.5
90	85		4xM6	2x6			351	30	15
125	120	75	4xM8	2x8	38.5	14.5	468	30	15
130	125		4xM8	2x8			612	22.5	11.25
165	160	100	4xM10	2x10	58.5	20	799	22.5	11.25
185	180		4xM10	2x10			1033	18	9
225	205		4xM10	2x10			1267	18	9
245	225		4xM10	2x10			1501	18	9

Ring Rail

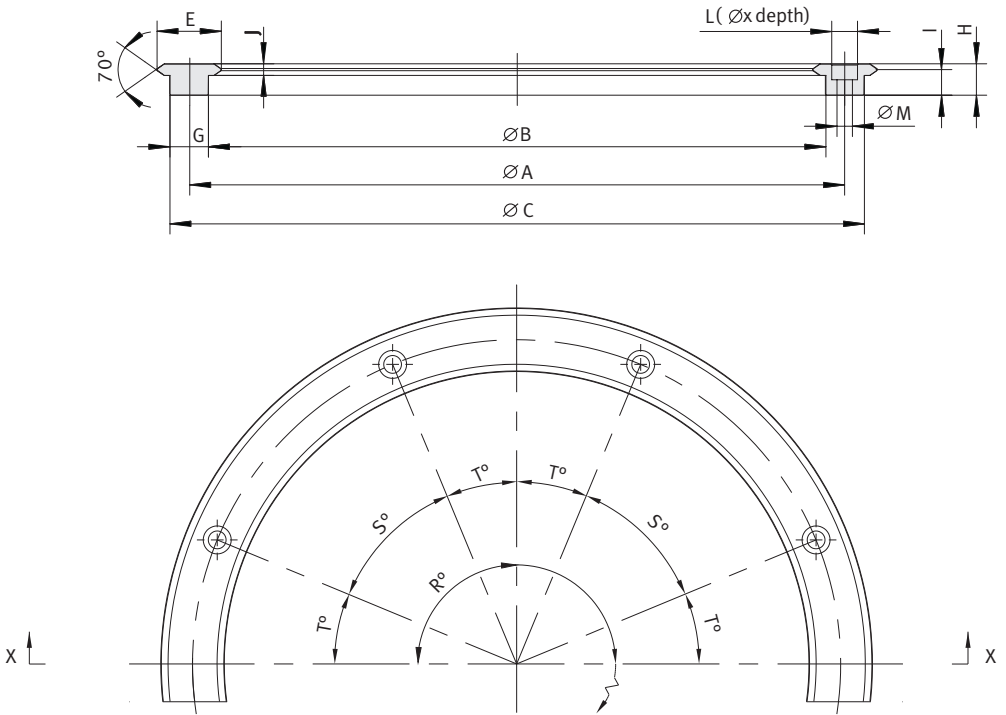

Type	Applicable Bearing	A	B	C	E	G	H
CR25 159	SVR-25	159	143.6	174.4	25	15	12.25
CR25 255	SVR-25	255	239.6	270.4	25	15	12.25
CR25 351	SVR-25	351	335.6	366.4	25	15	12.25
CR44 468	SVR-34	468	442	494	44	26	15.5
CR44 612	SVR-34	612	586	638	44	26	15.5
CR76 799	SVR-54	799	749	849	76	50	24
CR76 1033	SVR-54	1033	983	1083	76	50	24
CR76 1267	SVR-54	1267	1217	1317	76	50	24
CR76 1501	SVR-54	1501	1451	1551	76	50	24

Type Code

CR25 351 R180 (N)


Screw holes option

Segment angular 90°、180°、full 360° Ring

Ring rail size


I	J	L (\varnothing ×depth)	\varnothing M	Hole Number (R=360°)	Hole Position ± 0.2		Weight (kg) (R=360°)
					S°	T°	
10	4.2	10x6	6	8	45	22.5	0.77
10	4.2	10x6	6	8	45	22.5	1.2
10	4.2	10x6	6	12	30	15	1.65
12.5	6	11x7	7	12	30	15	5.1
12.5	6	11x7	7	16	22.5	11.25	6.7
19.5	9	20x13	11	16	22.5	11.25	25
19.5	9	20x13	11	20	18	9	32
19.5	9	20x13	11	20	18	9	41
19.5	9	20x13	11	20	18	9	48.7

Straight Rail

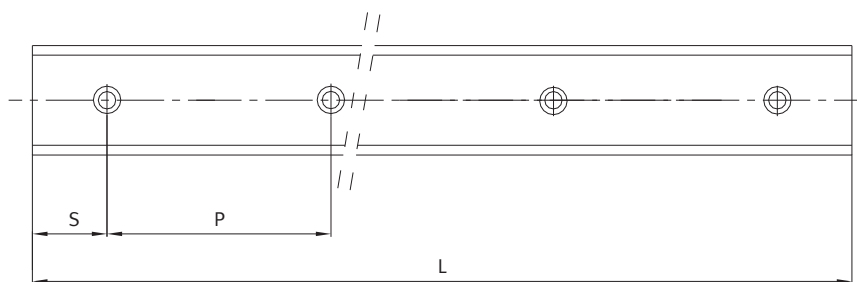


Type	A		B		C	
	G1	G3	G1	G3	G1	G3
SB-LGV25XL	25	25.2	12.25	12.9	15	15.5
SB-LGV44XL	44	44.2	15.5	16.2	26	26.5
SB-LGV76XL	76	76.2	24	24.7	50	50.5

Type Code




G1

SB- LGV 25 X1000 G1

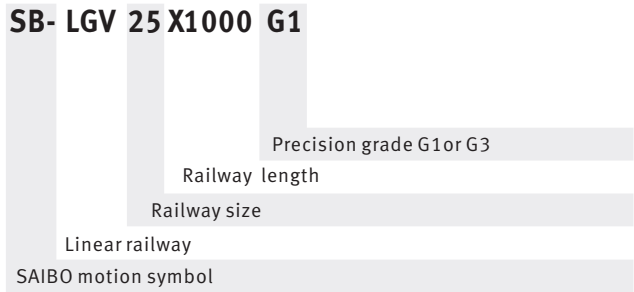


G		M	N x depth	P	S	Lmax	
G1	G3					G1	G3
10	10.35	5.5	10x5.5	90	45	2000	5500
12.5	12.85	7	11x7	90	45	2000	5500
19.5	19.85	11	20x12	90	45	1900	5500

Rollers

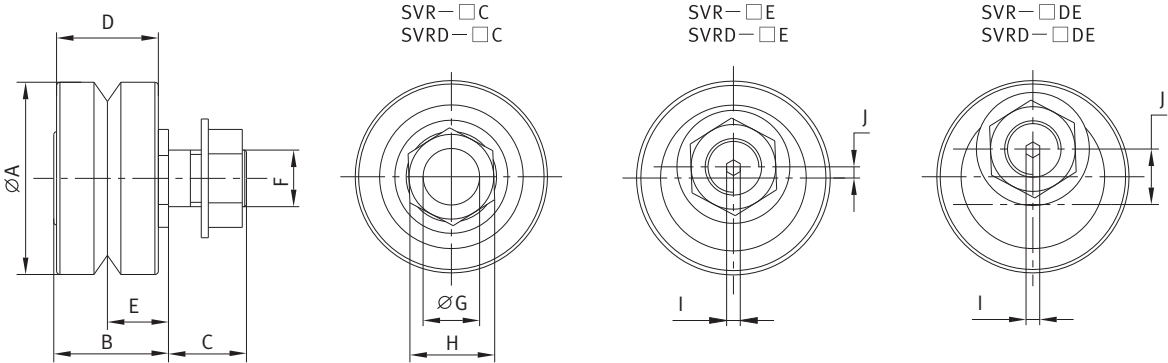


Type	Roller Category	Outer Diameter A	Eccentric Distance J	Bearing Load Capacities(N)			
				Radial		Axial	
				Co	C	Co	C
SVR-25C	Twin bearing	25	-	1320	3320	330	800
SVR-25E			0.75				
SVR-25DE			2				
SVRD-25C	Double row bearing		-	2535	7710	840	1650
SVRD-25E			0.75				
SVRD-25DE			2				
SVRF-25C	Floating bearing		-	6150	4980	-	-
SVRF-25DE			2				
SVR-34C	Twin bearing		34	-	2630	5980	560
SVR-34E		1					
SVR-34DE		2.5					
SVRD-34C	Double row bearing	-		5260	9690	1380	2540
SVRD-34E		1					
SVRD-34DE		2.5					
SVRF-34C	Floating bearing	-		12600	11000	-	-
SVRF-34DE		2.5					
SVR-54C	Twin bearing	54		-	6700	13700	1180
SVR-54E			1.5				
SVR-54DE			5.5				
SVRD-54C	Double row bearing		-	13400	22200	2800	4650
SVRD-54E			1.5				
SVRD-54DE			5.5				
SVRF-54C	Floating bearing		-	29000	21300	-	-
SVRF-54DE			5.5				

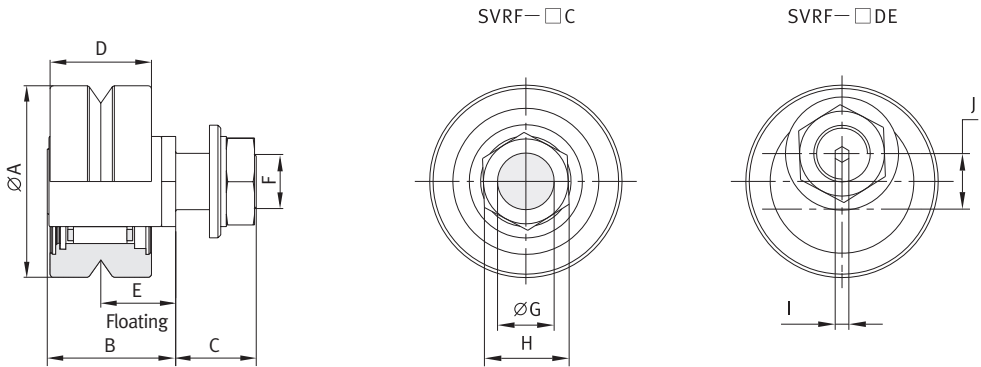


Dimension								
B	C	D	E		F	G	H	I
16.5	11.3	14	9		M8	8	13	3
18.1	11.3		Max 10.5	Min 9				
21	14.3	18	11.5		M10	10	15	4
23.2	14.3		Max 13.5	Min 11.5				
33.5	19.8	28	19		M14	14	27	6
37.2	19.8		Max 21.6	Min 19				

Linear Guide

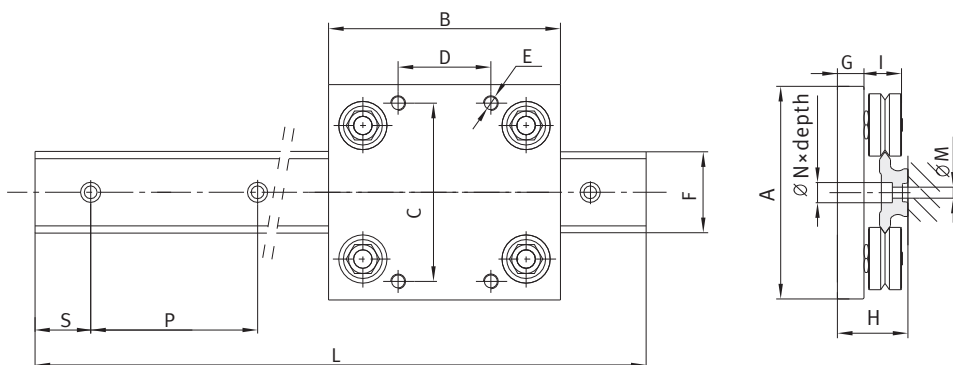

SLCA

Rail	Carriage	Roller	Dimension							
			A	B	C	D	E	F	G	H
			G1							
SB-LGV25XL	SLC25A	SVR-25C	80	80	65	24	4xM6	25	11.5	30.5
	SLC25B	SVR-25E		135		60	6xM6			
	SLC25C			180		82	6xM6			
SB-LGV44XL	SLC44A	SVR-34C	116	125	96	50	4xM8	44	14.5	38.5
	SLC44B	SVR-34E		180		80	6xM8			
	SLC44C			225		103	6xM8			
SB-LGV76XL	SLC76A	SVR-54C	185	200	160	90	4xM10	76	20	58.5
	SLC76B	SVR-54E		300		135	6xM10			
	SLC76C			400		185	6xM10			

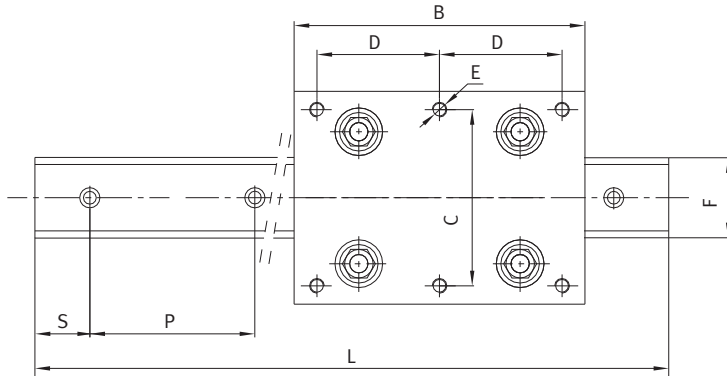


SLC B/C

						load capacities(N)					
G3	I	M	N x depth	P	S	Lmax		Double Row Bearings		Twin Bearings	
						G1	G3	Fy	Fz	Fy	Fz
30.85	16.5	5.5	10x5.5	90	45	2000	5500	1600	3000	1280	1200
38.85	21	7	11x7	90	45	2000	5500	3600	6000	3200	2800
58.85	33.5	11	20x12	90	45	1900	5500	10000	10000	7200	6400

Assembly manual

1. Match rollers to carriage plate

Please mount the concentric bearing to one side of carriage plate, and eccentric bearing to the other side following the direction of railway. In case of circle motion carriage, the concentric bearing should be mounted to the side where mounting-hole distance is shorter. Please refer to below picture.

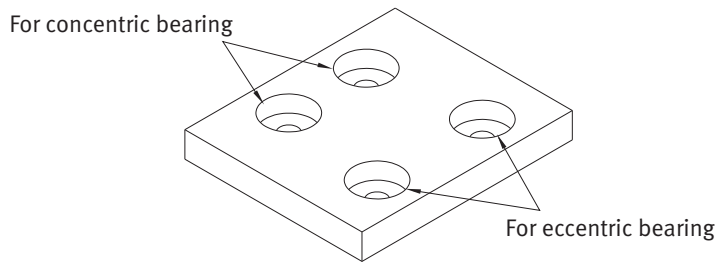

Circle motion carriage plate

2. Mounting to railway

Carriage assembly should be mounted from the end of railway. Please do not put any overstress when mounting.

3. Adjust the clearance between bearing and railway

- Tighten concentric bearings first.
- Then rotate eccentric bearing via rotate hexagonal key at the end of stud to adjust the clearance between railway and bearing.
- Adjust the clearance to zero.
- Slide the carriage by hand and adjust to the extent where there causes a slight slipping resistance.

Correct condition is where moving power becomes the recommended value as below table by putting load by push-pull gauge to the running direction of carriage.

Recommended pre-load by push-pull gauge

V track bearing size	Pre-load(N)
25	4
44	8
76	12

-Keep eccentric bearing's position and tighten the nut.

Important note


Appropriate pre-load provide the system rigidity. However, over preload will decrease system's life rapidly. Please be careful.

Load / Life calculation

Due to the hardness of the railway and fatigue analysis of railway and roller, the railway's life does not determine the system life. It is determined by roller's life. Load capacity of the motion guide system varies mainly by the size of bearing and railway, lubricated or not, and the load magnitude and direction. Other factors include speed and acceleration and environment etc. To calculate system life, loading factor LF should be calculated firstly. Here we provide two methods to calculate the loading factor.

Standard 4 bearings carriage calculation

If the system use SAIBO standard 4 bearings carriage, then calculation can use below formula.

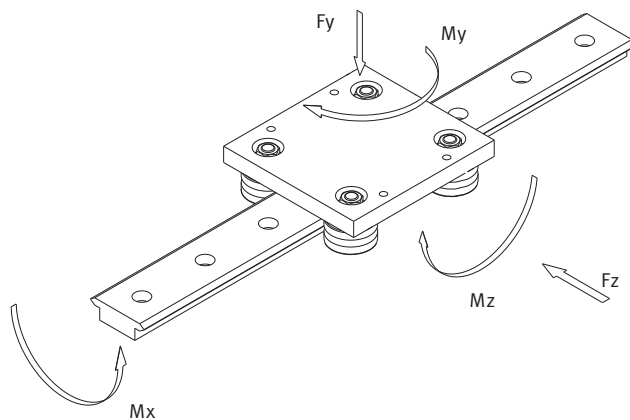

$$LF = \frac{F_y}{F_{y\max}} + \frac{F_z}{F_{z\max}} + \frac{M_x}{M_{x\max}} + \frac{M_y}{M_{y\max}} + \frac{M_z}{M_{z\max}}$$

F_y - Actual load in Y direction. (N)

F_z - Actual load in Z direction. (N)

M_x - Actual moment in X direction. (N·m)

M_y - Actual moment in Y direction. (N·m)

M_z - Actual moment in Z direction. (N·m)

Below parameters can be taken from the table of Load capacity.

F_{y max} - Max load capacity in Y direction. (N)

F_{z max} - Max load capacity in Z direction. (N)


M_{x max} - Max moment capacity in X direction. (N·m)

M_{y max} - Max moment capacity in Y direction. (N·m)

M_{z max} - Max moment capacity in Z direction. (N·m)

Straight rail carriage's load capacity

Carriage Type	Dry system Double Row Bearings and Twin Bearings					Lubricated system/Twin Bearings					Lubricated system/Double Row Bearings				
	Fy	Fz	Mx	My	Mz	Fy	Fz	Mx	My	Mz	Fy	Fz	Mx	My	Mz
	N	N	Nm	Nm	Nm	N	N	Nm	Nm	Nm	N	N	Nm	Nm	Nm
SLC25	410	410	4.6	200xD	200xD	1300	1225	14	600xD	640xD	1610	3020	18.2	1500xD	800xD
SLC44	790	790	16	400xD	400xD	3250	2830	65	1400xD	1600xD	3620	6050	74	3000xD	1800xD
SLC76	1850	1850	65	900xD	900xD	7250	6380	255	3200xD	3600xD	10050	10050	365	5000xD	5000xD

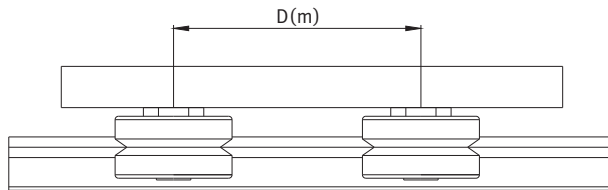


Ring rail carriage's load capacity

Carriage Type	Dry system Double Row Bearings and Twin Bearings					Lubricated system/Twin Bearings					Lubricated system/Double Row Bearings				
	Fy	Fz	Mx	My	Mz	Fy	Fz	Mx	My	Mz	Fy	Fz	Mx	My	Mz
	N	N	Nm	Nm	Nm	N	N	Nm	Nm	Nm	N	N	Nm	Nm	Nm
SRC25 159	410	410	4.6	8.7	8.7	1300	1225	14	25.5	27.5	1610	3020	18.2	65	33.5
SRC25 255	410	410	4.6	8.2	8.2	1300	1225	14	23.5	25.5	1610	3020	18.2	60	31.5
SRC25 351	410	410	4.6	8.7	8.7	1300	1225	14	24.5	27.5	1610	3020	18.2	64	33.5
SRC44 468	790	790	16	28.2	28.2	3250	2830	65	97	112	3620	6050	74	215	120
SRC44 612	790	790	16	28	28	3250	2830	65	100	110	3620	6050	74	225	130
SRC76 799	1850	1850	65	87	87	7250	6380	255	305	345	10050	10050	365	480	480
SRC76 1033	1850	1850	65	105	105	7250	6380	255	365	415	10050	10050	365	580	580
SRC76 1267	1850	1850	65	122	122	7250	6380	255	425	480	10050	10050	365	680	680
SRC76 1501	1850	1850	65	138	138	7250	6380	255	490	550	10050	10050	365	780	780

Roller load factor

If the system does not use SAIBO standard 4 roller carriage, It is necessary to calculate each roller's loading factor. Biggest loaded roller's load determines the system's life.



$$LF = \frac{F_y}{F_{y\max}} + \frac{F_z}{F_{z\max}}$$

LF - Loading factor

LF should be less than 1.0 for any combination of load

F_y - Actual axial capacity. (N)

F_z - Actual radial capacity. (N)

Below parameters can be taken from below table.

F_{y max} - Max axial load. (N)

F_{z max} - Max radial load. (N)

Roller's load capacity Please refer to page 13.

Life calculation After getting Loading Factor LF, the life in km can be calculated by selecting one of below two formulas. The basic life can be taken from table below.

Dry system

$$Life(km) = \frac{Basic_life}{(0.03+0.97LF*f)^2}$$

Lubricated system

$$Life(km) = \frac{Basic_life}{(0.03+0.97LF*f)^3}$$

Basic life


Bearing type	Dry system	Lubricated system
SVR-25	100	150
SVR-34	100	150
SVR-54	150	250

f - Reduction coefficient of the application and environment.

None vibration or shock, Low speed (<1m/s), Low frequency shift direction, clean environment.	1-1.5
Light vibration or shock, medium speed (1-2.5m/s) medium frequency shift direction, some dirtiness	1.5-2
Heavy vibration or shock, high speed (>2.5m/s) high frequency shift direction, heavy dirty	2-3.5

Calculation example

A machine use SB-LGV25 spacer railway and standard carriage. The carriage and work-piece total weight 8 kg. When the carriage moving, there is an external load of 50 N exerted as below drawing. Working environment is clean. There is none vibration or shock.

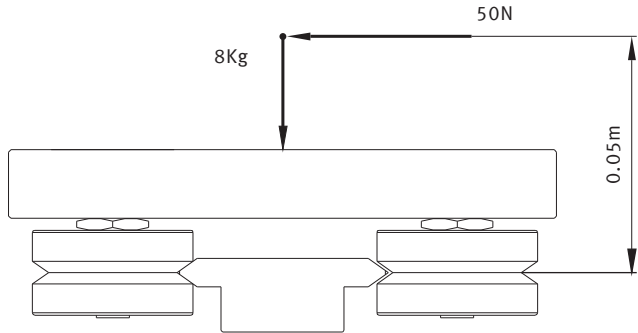

The load factor LF is calculated use formula

$$LF = \frac{F_y}{F_{y\max}} + \frac{F_z}{F_{z\max}} + \frac{M_x}{M_{x\max}} + \frac{M_y}{M_{y\max}} + \frac{M_z}{M_{z\max}}$$

$$F_y = 8\text{kg} \times 9.8 \text{ (gravity)} = 78.40 \text{ N}$$

$$F_z = 50 \text{ N}$$

$$M_x = 50 \times 0.05 = 2.5 \text{ N}\cdot\text{m}$$

$$M_y = 0$$

$$M_z = 0$$

Take parameters $F_y \max$, $F_z \max$, $M_x \max$, $M_y \max$, $M_z \max$ from table and then fill in the formula

$$LF = \frac{78.4}{1280} + \frac{50}{1200} + \frac{2.5}{14} + \frac{0}{M_{y\max}} + \frac{0}{M_{z\max}} = 0.2816$$

Then life (km) calculation can use formula as below:

Dry system

$$\text{Life(km)} = \frac{\text{Basic_life}}{(0.03+0.97LF*f)^2}$$

Basic life is 100km.

According to the description of working condition, take $f=1.3$.

$$\text{Life(km)} = \frac{100}{(0.03+0.97*0.2816*1.3)^2} = 674\text{km}$$

Lubricated system

Basic life is 150 km, take $f=1.1$

$$\text{Life(km)} = \frac{\text{Basic_life}}{(0.03+0.97LF*f)^3}$$

$$\text{Life(km)} = \frac{150}{(0.03+0.97*0.2816*1.1)^3} = 4155\text{km}$$

From this example, it shows clearly that lubrication is so important for the life. Please pay attention to install the lubrication system for your system.

LM76

Linear Bearings

Knowledge - Experience - Solution


LM76 is an international designer, manufacturer and supplier of linear bearings, linear shafting and linear slides.




When other's think catalog...We think SOLUTION

LM76

Linear Bearings *The Engineering Edge*

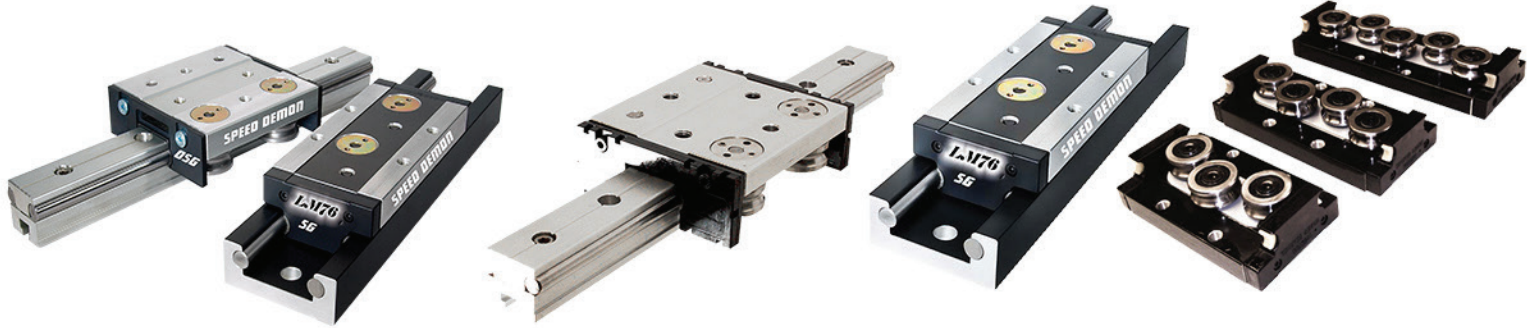

LM76
Linear Slide Division

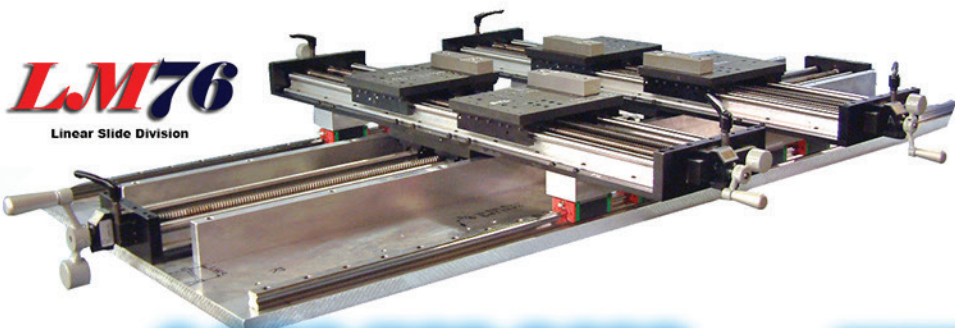

1-800-513-3163

WWW.LM76.COM